



ARM Power

PV 10000



Hybrid Inverter



PV-10000 WATTS (5000W x 2)
SOLAR MPPT

FEATURES:

- Dual outputs for smart load management
- Two independent AC power sources connected and switched automatically
- Built-in current transformer sensor to meet self-consumption application
- Support external BTS (Battery Temperature Sensor) detection
- Built-in 2.8" colored LCD with slide operation
- Built-in Wi-Fi for mobile monitoring and OTA firmware upgrade
- Supports USB On-the-Go function
- Reserved communication port for BMS (RS485, CAN-BUS or RS232)
- Support optional GFCI, Rapid shutdown, AFCI detections
- Parallel operation with 6 units
- Built-in power status lighting indicators
- Conformal Coating For PCB protection From Humidity

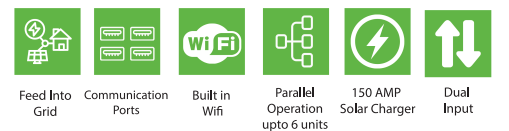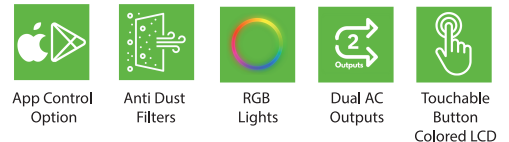


PURE SINE WAVE SOLAR INVERTER

ARM Power

PV 10000

Hybrid Inverter

SERVICES

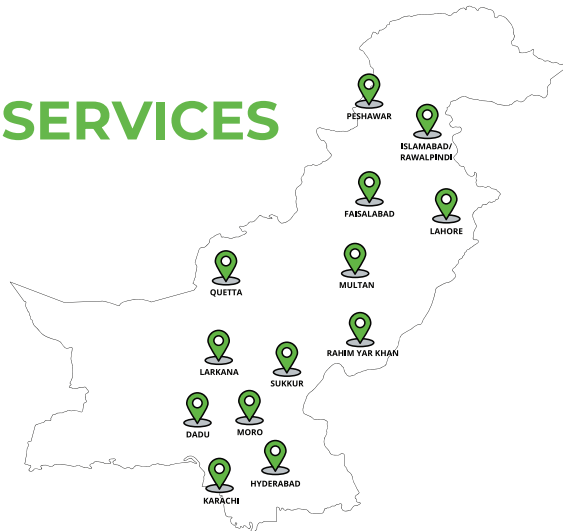

SPECIFICATIONS:

Axpert Ultra Inverter

MODEL	Axpert Ultra 8K	Axpert Ultra 11K
RATED POWER	8000VA/8000W	11000VA/11000W
PARALLEL CAPABILITY	YES, 6 units	
INPUT		
Voltage	230 VAC	
Selectable Voltage Range	170-280 VAC (For Personal Computers) 90-280 VAC (For Home Appliances)	
Frequency Range	50 Hz/60 Hz (Auto sensing)	
OUTPUT		
AC Voltage Regulation (Batt. Mode)	230VAC ± 5%	
Surge Power	16000VA	22000VA
Efficiency (Peak)	93%	
Transfer Time	10 ms (For Personal Computers) ; 20 ms (For Home Appliances)	
Waveform	Pure sine wave	
BATTERY		
Battery Voltage	48 VDC	
Floating Charge Voltage	54 VDC	
Overcharge Protection	63 VDC	
SOLAR CHARGER & AC CHARGER		
Solar Charger Type	MPPT	
Maximum PV Array Power	10000W (5000W x 2)	12000W (6000W x 2)
MPPT Range @ Operating Voltage	90 ~ 450 VDC	
Maximum PV Array Open Circuit Voltage	500 VDC	
Maximum PV Input Current	27A x 2 (MAX 40A)	
Maximum Solar Charge Current	150A	150A
Maximum AC Charge Current	120A	150A
Maximum Charge Current	150A	150A
PHYSICAL		
Dimension, D x W x H (mm)	145 x 438 x 553.6	
Net Weight (kgs)	18.4	
Communication Interface	USB/RS232/RS485/WiFi/Dry-contact/BTS Support optional GFCI , Rapid shutdown, AFCI detection	
External Current Sensor Port	Yes, built-in current transformer sensor	
OPERATING ENVIRONMENT		
Humidity	5% to 95% Relative Humidity(Non-condensing)	
Operating Temperature	-10°C to 50°C	
Storage Temperature	-15°C to 60°C	
STANDARD		
Compliance Safety	CE	